

ADDENDUM NO. 2 – July 24, 2025


Christopher Way Pipeline Maintenance


This addendum amends the Contract Drawings and Specifications for this project as follows:


1. See Revised Plans, Attachment A
2. See Revised Bid Schedule, Attachment B. Bids must be submitted on the Revised Bid Schedule.
3. Revise the Engineer's Estimate on Notice to Contractors, page 00020-1 and Instructions to Bidders, page 00100-6 to \$98,000.

When submitting the bid for the project, the Contractor must acknowledge receipt of the addendum.

Recommended by: 
Ken Reed
Senior Construction Manager



Date

Approved by:  FOR
Brad Taylor, PE
City Engineer

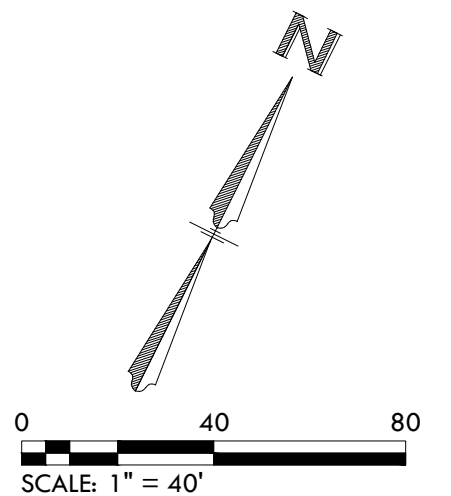

Date



1. CONTRACTOR TO CCTV EXISTING RECYCLED WATER LINE TO VERIFY CONDITIONS AND LATERALS. CONTRACTOR TO CAP AND CUT EVERY LATERAL CONNECTION.
2. CONTRACTOR TO FLUSH OUT AND PRESSURE TEST EXISTING PIPE.
3. ALL PROPOSED PIPE MATERIAL TO BE PVC C900 DR 18.



CONTRACTOR TO CONNECT TO EX. 20"RW
AND INSTALL 20"x16" REDUCER, 16"x16"
90° ELBOW. INSTALL MEGALUG JOINT
RESTRAINTS IN LIEU OF THRUST BLOCKS.



CHRISTOPHER WAY PIPELINE MAINTENANCE
CUPCCAA INFORMAL BID SOLICITATION

BID PROPOSAL FORMS

CHRISTOPHER WAY PIPELINE MAINTENANCE

REVISED BID SCHEDULE

BID ITEM	DESCRIPTION	QUANTITY	UNITS	UNIT PRICE	EXTENDED TOTAL
1	Mobilization / Demobilization	1	LS		
2	Bonds / Insurance	1	LS		
3	Traffic Control	1	LS		
4	Erosion and Sediment Control Plan (ESCP)	1	LS		
5	Trench Safety Plan per CA Labor Code §6707	1	LS		
6	Cut Out 5' Section of 20" C905 Pipe	2	EA		
7	CCTV Inspection	1	LS		
8	Supply and Install C905 Reducer 20" – 16"	1	EA		
9	Supply and Install C905 16" 90 Elbow	1	EA		
10	Supply and Install 16" C905 Pipe per City Std. Details R-48, R-49 and R-53	50	LF		
11	Supply and Install 16" C905 Blind Flange / Cap	1	EA		
12	Cut Out 5' Section of 12" C905 Pipe	3	EA		
13	Supply and Install 12" Blind Flange / Cap on Existing Laterals	3	EA		
14	Flushing and Pressure Testing	1	LS		
15	Restore Each Street Excavation per City Standard Detail R-50 and R-53	4	EA		
16	Remove / Replace PCC Curb & Gutter per City Std. Details R-4 and R-6	15	LF		
17	Site Restoration Outside of Road Prism	1	EA		
	TOTAL BID				\$

TOTAL BID: \$ _____

TOTAL BID IN WORDS: _____